CABO A RESORT EXTRUSIONS PRODUCT CODE: CABOMTX-A







PRODUCT DESCRIPTION

The Cabo aluminum extrusion profile system is an elegant and versatile solution for all of your display needs. Featuring a sleek silver anodized finish, the Cabo is the perfect solution for tradeshow booths, retail environments, pop up shops, or any place aluminum framing is needed. The profiles are available in standard 40mm and 80mm profile widths and in different shapes allowing you to turn your display vision into reality. Promote your company, new products, etc with custom dye sublimated fabric graphics. 12mm x 3mm silicone beading (SEG) is sewn around the perimeter of each fabric panel for easy installation and removal of your graphics. Choose from one of our pre designed configurations or contact us for a quote on something totally custom.

DISPLAY DIMENSIONS	236.8"W X 152.75"H X 120"D

GRAPHIC SIZE See Template Page

GRAPHIC MATERIAL

Dye-Sub Black & White Fabric

GRAPHIC FINISHING

12mm x 3mm silicone beading is sewn around the perimeter of the fabric graphic. Silicone beading is hidden from view once installed.

DISPLAY CONSTRUCTION

Extruded aluminum profile frame with aluminum and steel components

Shipping Weight 841 lbs (frame only) - LTL ONLY

(LTL weight includes crate)	891 lbs (frame & graphic) - LTL ONLY 50 lbs (graphic only) - UPS
Crate Shipping Dimensions	102"L x 49.5"W x 44.5"H (Graphic Package & Hardware Only)
GRAPHIC TURN AROUN	D TIME
5 business days after proof	approval for up to 2 booths
AVAILABILI	TY PFC










PARTS LIST HARDWARE ONLY

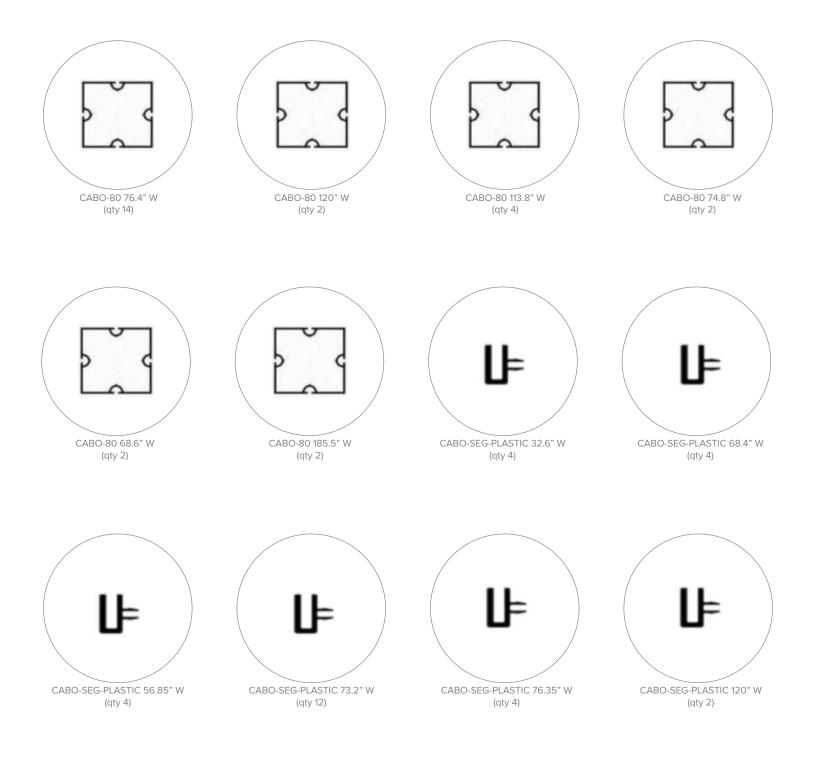




PARTS LIST HARDWARE ONLY








Template Guide

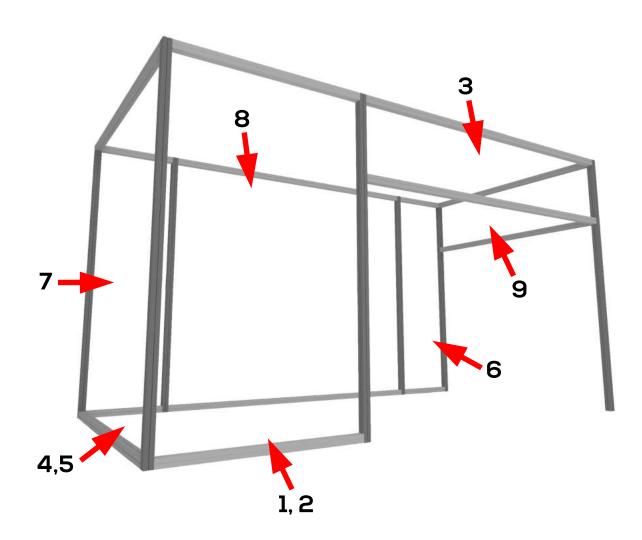

PANEL	DIMS	NOTES
1	74.8" W x 146.5" H	Outside Print
2	74.8" W x 146.5" H	Inside Print
3	185.4" W x 32.7" H	Outside Print
4	113.8" W x 146.5" H	Outside Print
5	113.8" W x 146.5" H	Inside Print
6	52.2" W x 146.5"H	Inside Print
7	52.2" W x 146.5"H	Inside Print
8	120" W x 146.5" H	Inside Print
9	113.8″ W x 32.7″ H	Outside Print

CABO A RESORT EXTRUSIONS PRODUCT CODE: CABOMTX-A



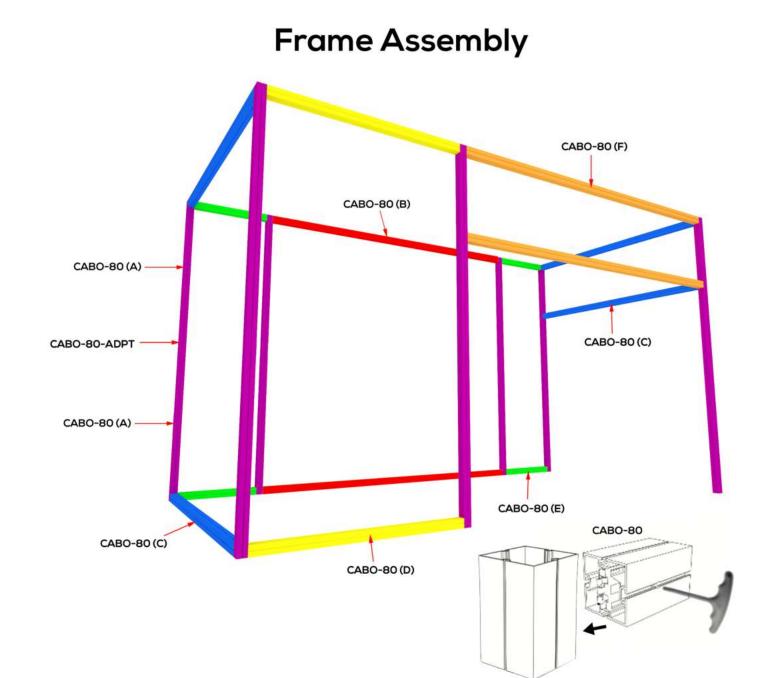

CABO-80

CABO 80 Profile Connection

- 1. Line up lock with system groove on vertical profile
- 2. Insert teeth of lock into groove
- 3. Use torx tool to tighten lock (turn clockwise to tighten)


CABO-80	CABO-80-ADPT

CABO-80-ADPT Conection


- 1. Insert CABO-80-ADPT into one CABO-80 profile
- 2. Slide opposing CABO-80 profile onto CABO-80-ADPT
- 3. Tighten screws on CABO-80-ADPT to secure profiles in place

REF	SKU	QTY	Length
А	CABO-80	14	76.4"
В	CABO-80	2	119.8"
С	CABO-80	4	113.6"
D	CABO-80	2	74.8"
E	CABO-80	4	52.2"
F	CABO-80	2	152.5"
F	CABO-80-ADPT	7	n/a



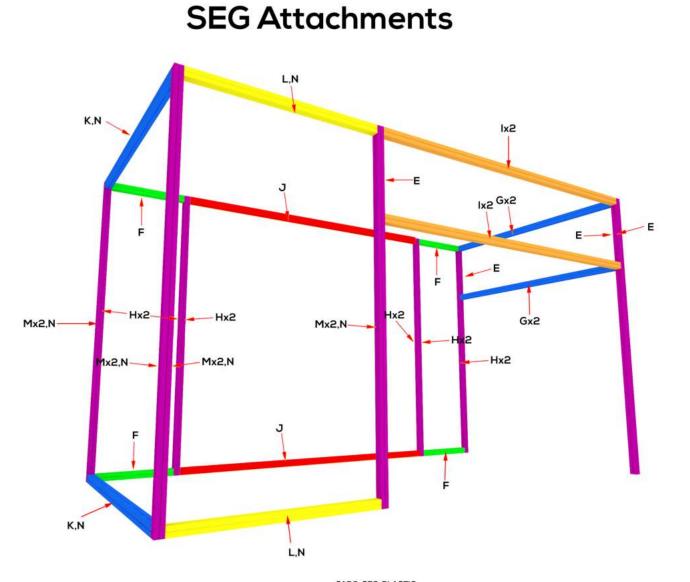

REF	SKU	QTY	LENGTH
E	CABO-SEG-PLASTIC	4	32.6"
F	CABO-SEG-PLASTIC	4	68.4
G	CABO-SEG-PLASTIC	4	56.85"
н	CABO-SEG-PLASTIC	12	73.2"
L.	CABO-SEG-PLASTIC	4	76.35"
J	CABO-SEG-PLASTIC	2	120"
к	CABO-80-SEG	2	74.7"
L	CABO-80-SEG	4	56.85
м	CABO-80-SEG	8	73.2"
N	CABO-HHS	57	n/a





10	 CABO-80-SEG
K.0-	 CABO-HHS

CABO-80-SEG Installation 1. Unscrew CABO-HHS and feed through holes on CABO-80-SEG 2. Line up CABO-HHS with system groove on profile CABO-80-SEG will attach to 3. Tighten CABO-HHS clockwise to secure